1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (213) 747-4500
FAX. (800) 727-9957 (213) 747-3234
E-Mail: sales@coronalighting.com

SPECIFICATION SHEET

PRODUCT # : CL-717-BT-GM

• Path Lights • Cast Brass

Fixture Specifications:

Housing: Die-cast brass

Stem: Solid brass "L" shaped pipe, corrosion resistant pipe, corrosion resistant

Finish: **GM- Gun Metal**. Natural toning process.
AB-Antique Bronze also available

Lens: Frosted, heat resistant plastic lens

Light Source: RGB-WW LED Module. Wattage: 1W-4W, CRI: >85
Beam Spread: 120º, Light Output: 35LM-300 LM

LED Features: CCT Options: Presets: 2200K, 2700K, 3000K, 4000K, 5000K, 5700K
Dimming: With every color temperature
Scenes: Customizable scenes with up to 8 color temperatures.
Compatibility: Amazon's Alexa* and Google Home*
*(*CX-BTG-2 gateway required, see below)*
Music: The lights will follow music collected by a device's microphone.

Connection: Bluetooth Mesh, *Range Extender (**CX-BTE**) is highly recommended, see below for details.*


Wiring: 10 Foot SPT-2W, UL Listed Wire connector sold seperately. Quick-locking connectors **(CX-LOC)** are available from Corona Lighting, find on page 2.

Mounting Spike: 8.5" Large Slotted Spike with Brass Threads


Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting, see page 3 for details. Voltage range for LED module is 9V-17V (6VA). Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Lifetime Warranty on Fixture Housing. Ten Year Warranty on Replaceable LED Module.






1W - 4W

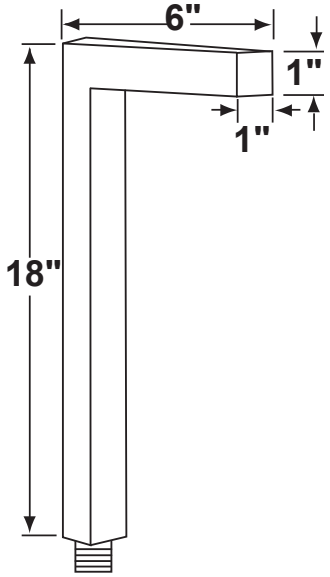

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender

CX-BTG-2 Wireless Bluetooth Mesh Gateway

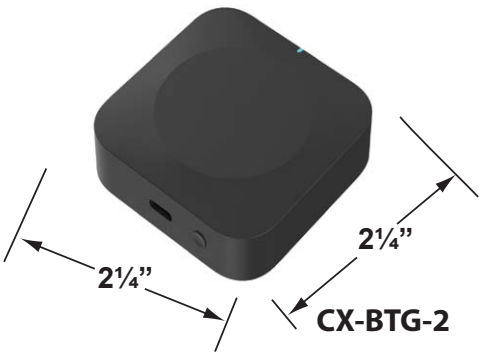



JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

FIAT LUX By CORONA Lighting

1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (213) 747-4500
FAX. (800) 727-9957 (213) 747-3234
E-Mail: sales@coronalighting.com


ACCESSORIES SHEET

PRODUCT # : CL-717-BT-GM

• Path Lights • Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**

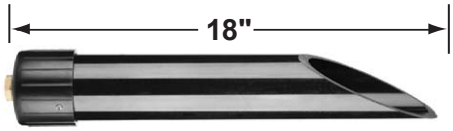


CX-603-BK

CX-621-BK 1" PVC Cap, ½" NPT, **Black**
CX-622-BK 2" PVC Cap, ½" NPT, **Black**
CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, **Black**

Ground Spikes

CX-650-BZ 8.5" Slotted ABS Spike, with brass threads ½" NPT, **Bronze**

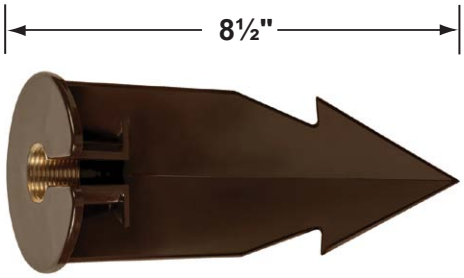

CX-650-BZ

Mounting Canopies

CX-705B-GM Brass Flat Canopy, ½ NPT, **Gun Metal**
CX-709B-GM Brass Raised Canopy, ½ NPT, **Gun Metal**
CX-718B-GM 5" Brass Canopy, 3-Hole ½ NPT, **Gun Metal**

Mounting Risers

CX-682B-GM 6" Brass Riser, ½ NPT Male/Female, **Gun Metal**
CX-683B-GM 12" Brass Riser, ½ NPT Male/Female, **Gun Metal**
CX-684B-GM 18" Brass Riser, ½ NPT Male/Female, **Gun Metal**
CX-685B-GM 24" Brass Riser, ½ NPT Male/Female, **Gun Metal**



CX-682B-GM 6"
CX-683B-GM 12"
CX-684B-GM 18"
CX-685B-GM 24"



CX-718B-GM




CX-709B-GM



CX-705B-GM

Cable Connector

CX-LOC Quick-locking Cable Connectors, **Tan**
(Installation Instructions)

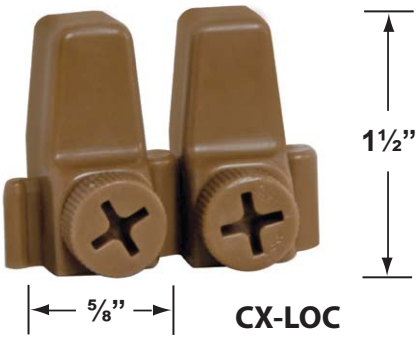

CX-LOC

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

FIAT LUX By CORONA Lighting

1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (213) 747-4500
FAX. (800) 727-9957 (213) 747-3234
E-Mail: sales@coronalighting.com

ACCESSORIES SHEET

PRODUCT # : CL-717-BT-GM

• Path Lights • Cast Brass

Stainless Steel Pool and Spa Rated Transformers

T-LT150-Z	150W, 12-15V Smart Zoning Single Circuit Transformer (Spec Sheet) | (Installation Instructions)
T-LT300-Z	300W, 12-15V Smart Zoning Single Circuit Transformer (Spec Sheet) | (Installation Instructions)
T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell



T-LT150-Z



T-FIDT



T-LT300-Z



T-LT300



T-LT150



T-LT75



T-TR-FIP

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.